



(11) Publication number : **0 430 184 B1**

(12)

EUROPEAN PATENT SPECIFICATION

(45) Date of publication of patent specification :
22.09.93 Bulletin 93/38

(51) Int. Cl.⁵ : **H01M 8/06, C01B 3/38**

(21) Application number : **90122675.3**

(22) Date of filing : **27.11.90**

(54) **Plate type reformer assembly.**

(30) Priority : **27.11.89 JP 304766/89**

(43) Date of publication of application :
05.06.91 Bulletin 91/23

(45) Publication of the grant of the patent :
22.09.93 Bulletin 93/38

(84) Designated Contracting States :
DE IT NL

(56) References cited :
EP-A- 0 308 976
PATENT ABSTRACTS OF JAPAN vol. 10, no. 262 (C-371) September 6, 1986 & JP-A-61 086 935 (KAWASAKI HEAVY IND LTD) May 2, 1986
PATENT ABSTRACTS OF JAPAN vol. 13, no. 119 (C-579)(3467) March 23, 1989 & JP-A-63 291 802 (HITACHI LTD) November 29, 1988

(73) Proprietor : **Ishikawajima-Harima Heavy Industries Co., Ltd.**
1-go, 2-ban, 2-chome, Ohtemachi Chiyoda-ku Tokyo (JP)

(72) Inventor : **Morishima, Satoshi**
5-8-5, Chita-Chuou, Kamisu-cho Kashima-gun, Ibaraki (JP)
 Inventor : **Chidiiwa, Sakae**
4-4-2-212, Kita-Kasai Edogawa-ku, Tokyo (JP)

(74) Representative : **Schaumburg, Thoenes & Thurn**
Mauerkircherstrasse 31 D-81634 München (DE)

EP 0 430 184 B1



Note : Within nine months from the publication of the mention of the grant of the European patent, any person may give notice to the European Patent Office of opposition to the European patent granted. Notice of opposition shall be filed in a written reasoned statement. It shall not be deemed to have been filed until the opposition fee has been paid (Art. 99(1) European patent convention).

EP 0 430 184 B1

Description

The present invention relates to a reformer assembly for reforming hydrocarbon such as methane under a presence of steam and particularly relates to a reformer assembly including a plurality of stacked plate-type reformers.

A lot of fuel cell systems have been developed until today. The fuel cell system is a power generation system and generally hydrogen is fed to an anode of the fuel cell and oxygen is fed to a cathode of the fuel cell to produce electricity. As the hydrogen is fed to the fuel cell, the hydrocarbon gas such as methane is reformed to a raw material gas for the anode under a presence of steam with a reforming catalyst. The reforming reactions which take place at the just mentioned reformation are:



These reactions are endothermic reactions and in order to maintain reforming temperature it is necessary to heat reforming reaction parts.

A conventional plate-type reformer assembly includes reforming plates and combustion plates. The reforming plates and the combustion plates are stacked one after another, thereby defining multiple layers. Generally, the reforming plate is filled with the reforming catalyst and the combustion plate is filled with combustion catalyst. Fuel and air are simultaneously fed to the combustion plates and combusted therein to heat the adjacent upper and lower reforming plates (the combustion plate is sandwiched by the reforming plates). The combustion plate has an entrance and an exit. The reforming temperature of the raw material gas passing through the reforming plates is maintained at a proper level by the combustion in the combustion plates. However, in a case where the fuel and the air are simultaneously fed to the combustion plates, the combustion entirely or mostly takes place near the entrance of the combustion plate and reaches flame temperature. Therefore, a large temperature difference appears between the entrance and the exit of the combustion plate.

Japanese Utility Model Registration Application No. 62-145404 eliminates the above-mentioned drawback. According to an arrangement of this application, a combustion section includes a combustion plate and a dispersion plate. Air is fed to the combustion plate and fuel is fed to the dispersion plate. The fuel fed to the dispersion plate is homogeneously fed into the entire combustion plate. As a result, a homogeneous combustion takes place in the combustion plate and a flat temperature distribution is obtained.

However, in the plate type reformer assembly of Japanese Utility Model Registration Application No. 62-145404, passages for feeding and discharging various gases penetrate the plate type reformers. Consequently, it is necessary to provide adequate sealing between the plates (of reformers) which are stacked one after another.

An object of the present invention is to provide a plate type reformer assembly which only requires simple sealing between the plates.

Another object of the present invention is to provide a plate type reformer assembly whose gas-feeding and discharging ports are simple and require only simple sealing.

According to one aspect of the present invention, there is provided a reformer assembly characterized in that masking frames are integrally mounted on peripheries of plate members to define a fuel introduction plate (fuel feeding plate), a combustion chamber plate filled with combustion catalyst and a reforming chamber plate filled with reforming catalyst respectively, that fuel feed ports are formed in the masking frame of the fuel introduction plate, that a number of dispersion openings (holes) are formed in the plate member of the combustion chamber plate, that an air feeding port and an exhaust gas discharging port are formed in the masking frame of the combustion chamber plate, that a raw material gas feed port and a reformed gas discharge port are formed in the masking frame of the reforming chamber plate, that these plates are stacked in turn and the peripheries of the plates are welded to each other thereby defining a multi-layer unit and that manifolds for the gas-feeding and discharging ports are aligned and mounted on lateral faces of the multi-layer unit. According to this arrangement, each masking frame is integrally provided on the periphery of each plate member, and the gas feeding and discharging passages are formed in the masking plates. Also, the plates are welded to each other. Therefore, the sealing between the plates becomes adequate. In addition, the feeding and the discharging of the various gases become easy since the manifolds are mounted on the lateral faces of the multi-layer unit.

Figure 1 is a perspective partial sectional view of a plate type reformer assembly according to the present invention;

Figure 2 is a set of view illustrating detail of three plates of the reformer assembly of Figure 1;

Figure 3 is a perspective view when manifolds are mounted on a multi-layer unit;

Figure 4 is a rear view of a plate type reformer assembly according to the present invention;

Figure 5 is a top view of the plate type reformer assembly;

EP 0 430 184 B1

Figure 6 is a front view of a plate type reformer assembly; and

Figure 7 is a lateral view of the plate type reformer assembly.

A preferred embodiment of the present invention will be described with reference to the accompanying drawings.

5 Referring first to Figure 1, a plate type reformer assembly includes a multi-layer unit 10. The multi-layer unit 10 includes fuel introduction plates 11, combustion chamber plates 12 and reforming chamber plates 13. These plates are stacked in turn to define the multi-layer unit 10.

The plates 11, 12 and 13 are illustrated in detail in Figures 2(a), 2(b) and 2(c) respectively. The plates 11, 12 and 13 respectively include plate members 14a, 14b and 14c and masking frames 15a, 15b and 15c. The masking frame 15a is integrally welded on a periphery of the plate member 14a. Such is the case with the masking frame 15b and the plate member 14b and with the masking frame 15c and the plate member 14c. The plate members 14a, 14b and 14c are equal to each other in size. As illustrated in Figure 2(c), a fuel feeding port 16 is formed in the masking frame 15c of the fuel introduction plate 11. An air feeding port 17 and an exhaust gas discharging port 18 are formed in the masking frame 15b of the combustion chamber plate 12, and a number of dispersion holes 19 are formed in the plate member 14b of the combustion chamber plate 12, as shown in Figure 2(b). A raw material gas feeding port 20 and a reformed gas discharging port 21 are formed in the masking frame 15a of the reforming chamber plate 13, as shown in Figure 2(a). Partition members 22 and 23 stand on the plate members 14a to 14c. The partition plate 22 (or 23) has a concave-convex portion at the top and bottom thereof. The partition plates 22 and 23 define therebetween a reforming chamber 24 on the reforming chamber plate 13. Reforming catalyst is placed in the reforming chamber 24. Likewise, the partition members 22 and 23 extend through the combustion chamber plate 12 to define a combustion chamber 25 on the combustion chamber plate 12 between the partition members 22 and 23. Combustion catalyst is placed in the combustion chamber 25. The partition members 22 and 23 further extend through the fuel introduction plate 11 to define a fuel introduction chamber 31 on the fuel introduction plate 11 between the partition members 22 and 23. Outside the partition plates 22 and 23 on the plates 11, 12 and 13 respectively, there are formed entrance rooms 26 and exit rooms 27. The feeding and discharging ports 16, 17, 18, 20 and 21 for various gases communicate with the entrance rooms 26 and the exit rooms 27. Predetermined number of small cylindrical elements, which serve as spacers, 28 are provided on the plate members 14a, 14b and 14c respectively. The spacers 28 and the masking frame 15a (or 15b or 15c) respectively reach a substantially same height in a direction the plates 11, 12 and 13 are stacked (The masking frames 15a, 15b and 15c have different heights and the spacers 28 have three heights for the respective frames).

The raw material gas feeding port 20 of the reforming chamber plate 13 is formed in the masking frame 15a in a manner such that the port 20 communicates with the entrance room 26. The masking frame 15a has an opening 29 which is next to the raw material gas feeding port 20. The reforming catalyst is inserted (or loaded) into the reforming chamber 24 through the catalyst insertion and removal (or loading and unloading) opening 29. Likewise, the masking frame 15b of the combustion chamber plate 12 has an opening 30 which is next to the air feeding port 17. The combustion catalyst is placed into the combustion chamber 25 through the second catalyst insertion and removal opening 30. The dispersion holes 19 are bored between the partition elements 22 and 23, but a predetermined margin (d) is left on the exit room 27 side, as shown in Figure 2(b).

40 The combustion chamber plate 12 is placed on the fuel introduction plate 11 associated with the masking frame 15 and the partition members 22 and 23 (The plates 12 and 13 are also associated with the masking frame 15 and the partition members 22 and 23) and then the reforming chamber plate 13 is placed on the combustion chamber plate 12. After that, another fuel introduction plate 11 is placed on the reforming chamber plate 13. Then, the plates 11, 12 and 13 are stacked in turn while a welding such as TIG or MIG is applied to the adjacent plates, thereby forming the multi-layer unit 10 of Figure 3. On the reforming chamber plate 13 of the top layer of the layer unit 10, there is provided a separation or isolation plate 32 which covers the reforming chamber 24, the entrance room 26 and the exit room 27, as shown in Figure 1. Also as shown in Figure 1, a supporting frame/plate 33 is provided on the separation plate 32 and an upper plate 34 is provided on the supporting frame/plate 33. Under the fuel introduction plate 11 of the bottom layer of the multi-layer unit 10, there is provided a lower support frame/plate 35. A lower plate 36 is provided under the lower support frame/plate 35.

After the multi-layer unit 10 is assembled in a manner described just above, the feeding and discharging ports 16, 17, 18, 20 and 21 are aligned in a height direction of the unit 10 and on the lateral face of the unit 10. Manifolds 37, 38, 39 and 40 are provided for the feeding and discharging ports 16, 17, 18, 20 and 21 respectively by means of welding. Specifically, the fuel feeding manifold 37 is provided for the fuel feeding port 16 of the fuel introduction plate 11, the air feeding manifold 38 is provided for the air feeding port 17 of the combustion chamber plate 12, the exhaust gas manifold 39 is provided for the exhaust gas port 18 of the plate 12, the raw material gas feeding manifold 40 is provided for the raw material gas feeding port 20 of the re-

EP 0 430 184 B1

forming chamber plate 13 and the reformed gas discharging manifold 41 is provided for the discharge port 21 of the reforming plate 13.

The manifolds 37, 38, 39, 40 and 41 include connecting cylinders 37a, 38a, 39a, 40a and 41a and flanges 37b, 38b, 39b, 40b and 41b, respectively. The cylindrical members 37a to 41a cover the aligned feeding and discharging ports 16, 17, 18, 20 and 21 at the lateral face of the multi-layer unit 10. In this case, the cylindrical members 38a and 40a of the air feeding manifold 38 and the raw material gas feeding manifold 40 also cover the combustion catalyst filling port 30 and the reforming catalyst filling port 29, respectively. Plates 42 and 43 are provided at the catalyst filling ports 30 and 29. The plates 42 and 43 have slit-like openings 30a and 29a which respectively correspond to the catalyst filling openings 30 and 29, as shown in Figures 4 to 6. The plates 42 and 43 are welded on the multi-layer unit 10. The cylindrical members 38a and 40a of the air feeding manifold 38 and the raw material gas feeding manifold 40 also cover the plate 42 and 43. Sealing plates 44 and 45 are removably mounted on the plates 42 and 43 by means of, for example, screws to close the slit-like openings 30a and 29a.

With the reformer assembly being constructed in the above manner, the combustion catalyst (spheres) 46 (for example, palladium-containing catalyst) and the reforming catalyst (spheres) 47 (for example, nickel-containing catalyst) are filled into the combustion chamber 25 and the reforming chamber 24 from the slit-like openings 30a and 29a of the plates 42 and 43 of the air feeding manifold 38 and the raw material gas feeding manifold 40, as depicted in Figure 1. Then, the sealing plates 44 and 45 are mounted on the plates 42 and 43 by screws to close the openings 30a and 29a.

During the reforming operation, the fuel gas (for example, offgas discharged from the anode of the fuel cell) is fed into the fuel feeding manifold 37 and the air is fed from the air feeding manifold 38. On the other hand, the raw material gas containing methane and steam is fed from the raw material gas feeding manifold 40. These gases are introduced from the manifolds 37, 38 and 40 to the entrance rooms 26 of the plates 11, 12 and 13 via the feeding ports 16, 17 and 20 formed in the plates 11, 12 and 13 respectively and then flow into the chambers inside the plates 11, 12 and 13 via the concave portions of the partition elements 22. As the fuel gas enters the introduction chamber 31 of the fuel introduction plate 11 via the inlet port 16 and the entrance room 26, the fuel gas flows homogeneously into the entire combustion chamber 25 from the introduction chamber 31 via the dispersion holes 19 of the upper combustion chamber plate 12. On the other hand, the air is fed into the combustion chamber 25 via the air feeding port 17 of the combustion chamber plate 12, the entrance room 26 and the concave portion of the partition member 22. Then, the air mixes with the fuel gas entering the combustion chamber 25 through the dispersion holes 19 to cause the combustion with help of the combustion catalyst. The exhaust gas of this combustion flows into the exit room 27 via the exit side partition member 23 and is discharged from the discharge port 18 via the exhaust manifold 39. The heat generated upon the combustion in the combustion chamber 25 is transferred to the reforming chamber 24 via the reforming chamber plate 13. Methane and steam are fed to the reforming chamber 24 via the feeding port 20 and the entrance room 26 and reformed to H_2 and CO gas with help of reforming catalyst due to the above-mentioned reforming reactions. The gases after the reformation are introduced, for example, to the anode of the fuel cell from the exit room 27 through the discharge port 21 and the reforming gas discharging manifold 41. As the quality of the combustion catalyst 46 and the reforming catalyst 47 are lowered due to the long period of usage, the sealing plates 44 and 45 are removed and the old catalysts 46 and 47 will be replaced by new ones through the openings 30a and 29a of the plates 42 and 43.

Since each plate 11, 12 or 13 has the welding around the periphery thereof, the feeding and discharging ports 16, 17, 18, 20 and 21 are opened in the lateral face of the multi-layer unit 10, and the manifolds 37, 38, 39, 40 and 41 for the ports 16, 17, 18, 20 and 21 are mounted by the welding, the sealing between the plates 11, 12 and 13 becomes unnecessary. Therefore, the characteristics related to the gas leakage is considerably improved. In addition, since the major manufacturing steps are only the plate-stacking and the manifold-welding, the manufacturing is simplified.

In the foregoing embodiment, the plate 11 has the entrance room 26 and the exit room 27 at the same location as the plates 12 and 13 have. However, the entrance room 26 and the exit room 27 of the plate 12, for instance, may be formed at another location. In addition, the destinations of the air and the fuel may be exchanged to each other. Furthermore, in order to accommodate the thermal expansion of the plate 11 (or/and 12 or/and 13), the plate member 14a (or/and 14b or/and 14c) may have a wave-like portion between and near the partition members 22 and 23.

In the above embodiment, the combustion catalyst mainly includes the spherical catalyst in order to make the catalyst exchange easier. However, it is of course that the catalyst may have a form other than the sphere.

EP 0 430 184 B1

Claims

1. A plate type reformer assembly comprising:
 5 a fuel introduction plate (11) having a first plate member (14c) and a first masking frame (15c), the first masking frame (15c) having a height, the first masking frame (14c) being integrally mounted on the periphery of the first plate member, a fuel feeding port being formed in the first masking frame (15c);
 a combustion chamber plate (12) having a second plate member (14b) and a second masking frame (15b), the second masking frame (15b) having a height, the second masking frame (15b) being integrally mounted on the periphery of the second plate member (14b), a plurality of dispersion holes (19) being formed
 10 in the second plate member (14b), an air feeding port (17) and an exhaust gas discharging port (18) being respectively formed in the second masking frame (15b), combustion catalyst (46) being placed in the second masking frame (15b);
 a reforming chamber plate (13) having a third plate member (14a) and a third masking frame (15a), the third masking plate (15a) having a height, the third masking frame (15a) being integrally mounted on the periphery of the third plate member (14a), a raw material gas feeding port (20) and a reformed gas dis-
 15 charging port (21) being respectively formed in the third masking frame (15a), reforming catalyst (47) being placed in the third masking frame (15a);
 a multi-layer unit (10) including the fuel introduction plates (11), the combustion chamber plates (12), the reforming chamber plates (13) and a separation plate (32), the fuel introduction plates (11), the combustion chamber plates (12) and the reforming chamber plates (13) being stacked in turn to define multiple layers
 20 (a top layer being referred to as "an uppermost layer"), the multi-layer unit (10) having a height direction and a lateral face, with the feeding and discharging ports (16, 17, 18, 20, 21) of the plates (11, 12, 13) being aligned with each other in the height direction of the multi-layer unit (10), the separation plate (32) being provided on the reforming chamber plate (13) of the uppermost layer of the unit (10), the fuel introduction plate (11), the combustion chamber plate (12), the reforming chamber plate (13) and the sep-
 25 aration plate (32) being welded to each other at the peripheries thereof, and manifolds (37, 38, 39, 40, 41) welded on the lateral face of the multi-layer unit (10) to cover the feeding and discharging ports (16, 17, 18, 20, 21).
- 30 2. The assembly of claim 1, characterized in that each plate (11; 12; 13) has a pair of partition members (22, 23) on the plate member (14c; 14b; 14a) thereof to define the fuel introduction chamber (31), the combustion chamber (25) or the reforming chamber (24) between the partition members (22, 23) and to define an entrance room (26) and an exit room (27) outside the partition members (22, 23) (the partition member (22) defining the entrance room (26) being called "entrance room side partition member" and the partition
 35 member (23) defining the exit room (27) being called "exit room side partition member").
3. The assembly of claim 1 or 2, characterized in that the partition member (22; 23) has a convex-concave portion to allow gases to pass through the partition member (22; 23) via the concave portion.
- 40 4. The assembly of claim 1, 2 or 3, characterized in that each plate (11; 12; 13) has a plurality of spacer members (28) on the plate member (14c; 14b; 14a) thereof, the spacer member (28) reaching the height of the masking frame (15c; 15b; 15a).
5. The assembly of claim 1, 2, 3 or 4, characterized in that the dispersion holes (19) of the combustion chamber plate (12) are formed in the plate member (14b) between the partition members (22, 23).
 45
6. The assembly of claim 1, 2, 3, 4 or 5, characterized in that the dispersion holes (19) are not formed in a predetermined area near the partition member (23) on the exit room (27) side.
7. The assembly of any one of foregoing claims, characterized in that a first opening (30) is formed in the
 50 second masking frame (15b) for insertion and removal of catalyst (46) into and from the combustion chamber (25) of the combustion chamber plate (12).
8. The assembly of any one of foregoing claims, characterized in that the first catalyst insertion and removal opening (30) is formed near the partition member (22) on the entrance room (26) side and is aligned with
 55 the air feeding port (17) formed near the partition member (22) on the entrance room (26) side.
9. The assembly of any one of foregoing claims, characterized in that a second opening (29) is formed in the third masking frame (15a) for insertion and removal of catalyst (47) into and from the reforming cham-

EP 0 430 184 B1

ber 824) of the reforming chamber plate (13).

10. The assembly of any one of foregoing claims, characterized in that the second catalyst insertion and removal opening (29) is formed near the partition member (22) on the entrance room (26) side and is aligned with the raw material gas feeding port (20) formed near the partition member (22) on the entrance room (26) side.
11. The assembly of any one of foregoing claims, characterized in that the multi-layer unit (10) is formed in a manner such that the entrance rooms (26) and the exit rooms (27) of the fuel introduction plates (11), the combustion chamber plates (12) and the reforming chamber plates (13) are aligned with each other in the height direction of the multi-layer unit (10).
12. The assembly of any one of foregoing claims, characterized in that the multi-layer unit (10) has four lateral faces, each two faces facing each other, and the air feeding port (17) and the first catalyst insertion and removal opening (30) of the combustion chamber plate 812) are formed in a lateral face facing an opposite face in which the raw material gas feeding port (20) and the second catalyst insertion and removal opening (29) of the reforming chamber plate (13) are formed.
13. The assembly of any one of foregoing claims, characterized in that the plates (11, 12, 13, 32) are welded by TIG or MIG welding.
14. The assembly of any one of foregoing claims, characterized in that the manifold (37, 38, 39, 40, 41) includes a connecting cylinder (37a, 38a, 39a, 40a, 41a) welded on the lateral face of the multi-layer unit (10) and covering the feeding and discharging ports (16, 17, 18, 20, 21) and a flange (37b, 38b, 39b, 40b, 41b) connected to the connecting cylinder (37a, 38a, 39a, 40a, 41a).
15. The assembly of any one of foregoing claims, characterized in that the raw material gas feeding manifold (40) and the air feeding manifold (38) respectively have configuration to cover the feeding ports (20, 17) and the catalyst insertion and removal ports (29, 30), and the catalyst insertion and removal ports (29, 30) are provided with sealing means to seal themselves.
16. The assembly of any one of foregoing claims, characterized in that the sealing means includes a plate (42, 33) having a slit-like opening (29a, 30a) corresponding to the catalyst insertion and removal port (29, 30) and welded on the lateral face of the multi-layer unit (10) and a sealing plate (44, 45) mounted on the plate (42, 43) by means of screws.
17. The assembly of any one of foregoing claims, characterized in that a pair of upper and lower supporting plates (33, 35) are mounted on the top and the bottom of the multi-layer unit (10), and another pair of upper and lower plates are mounted on the supporting plates (33, 35).
18. The assembly of any one of foregoing claims, characterized in that the plates (11, 12, 13) are welded by welding of the periphery of the adjacent plates (11, 12, 13).

Patentansprüche

1. Plattenförmige Reformeranordnung, umfassend:
eine Brennstoffeinführplatte (11) mit einem ersten Plattenelement (14c) und einem ersten Abdeckrahmen (15c), der eine Höhe hat und an dem Umfang des ersten Plattenelementes mit diesem verbunden ist, wobei eine Brennstoffeinlaßöffnung in dem ersten Abdeckrahmen (15c) ausgebildet ist;
eine Brennkammerplatte (12) mit einem zweiten Plattenelement (14b) und einem zweiten Abdeckrahmen (15b), der eine Höhe hat und an dem Umfang des zweiten Plattenelementes (14b) mit diesem verbunden ist, wobei eine Vielzahl von Verteilerlöchern (19) in dem zweiten Plattenelement (14b) ausgebildet ist, eine Lufteinlaßöffnung (17) bzw. eine Abgasauslaßöffnung (18) in dem zweiten Abdeckrahmen (15b) ausgebildet sind und wobei ein Verbrennungskatalysator (46) in dem zweiten Abdeckrahmen (15b) angeordnet ist;
eine Reformierkammerplatte (13) mit einem dritten Plattenelement (14a) und einem dritten Abdeckrahmen (15a), der eine Höhe hat und an dem Umfang des dritten Plattenelementes (14a) mit diesem verbunden ist, wobei eine Rohgaseinlaßöffnung (20) bzw. eine Reformergasauslaßöffnung (21) in dem dritten Ab-

EP 0 430 184 B1

deckrahmen (15a) ausgebildet sind und wobei ein Reformierkatalysator (47) in dem dritten Abdeckrahmen (15a) angeordnet ist;

eine Mehrschichteneinheit (10), umfassend die Brennstoffeinführplatten (11), die Brennkammerplatten (12), die Reformierkammerplatten (13) und eine Trennplatte (32), wobei die Brennstoffeinführplatten (11), die Brennkammerplatten (12) und die Reformierkammerplatten (13) abwechselnd aufeinander gestapelt sind, um mehrfache Schichten zu bilden (eine obere Schicht wird dabei als "eine oberste Schicht" bezeichnet), wobei die Mehrschichteneinheit (10) eine Höhenrichtung und eine Seitenfläche hat, die Einlaß- und Auslaßöffnungen (16, 17, 18, 20, 21) der Platten (11, 12, 13) in Höhenrichtung der Mehrschichteneinheit (10) in Flucht miteinander liegen, die Trennplatte (32) an der Reformierkammerplatte (13) der obersten Schicht der Einheit (10) angeordnet ist, und wobei die Brennstoffeinführplatte (11), die Brennkammerplatte (12), die Reformierkammerplatte (13) und die Trennplatte (32) an ihren Umfangsrändern miteinander verschweißt sind; und

Anschlußstutzen (37, 38, 40, 41), die an der Seitenfläche der Mehrschichteneinheit (10) angeschweißt sind, um die Einlaß- und Auslaßöffnungen (16, 17, 18, 20, 21) abzudecken.

2. Anordnung nach Anspruch 1, dadurch gekennzeichnet, daß jede Platte (11, 12, 13) zwei Unterteilungselemente (22, 23) auf ihrem Plattenelement (14c, 14b, 14a) hat, um die Brennstoffeinführkammer (31), die Brennkammer (25) oder die Reformierkammer (24) zwischen den Unterteilungselementen (22, 23) zu begrenzen und einen Eintrittsraum (26) und einen Austrittsraum (27) außerhalb der Unterteilungselemente (22, 23) zu begrenzen, wobei das den Eintrittsraum (26) begrenzende Unterteilungselement (22) als "eintrittsraumseitiges Unterteilungselement" und das den Austrittsraum (27) begrenzende Unterteilungselement (23) als "austrittsraumseitiges Unterteilungselement" bezeichnet wird.
3. Anordnung nach Anspruch 1 oder 2, dadurch gekennzeichnet, daß das Unterteilungselement (22, 23) einen konvex-konkaven Abschnitt hat, um Gase durch das Unterteilungselement (22, 23) via den konkaven Abschnitt durchtreten zu lassen.
4. Anordnung nach Anspruch 1, 2 oder 3, dadurch gekennzeichnet, daß jede Platte (11; 12; 13) eine Vielzahl von Abstandselementen (28) auf ihrem Plattenelement (14c; 14b; 14a) hat, wobei das Abstandselement (28) die Höhe des Abdeckrahmens (15c; 15b; 15a) erreicht.
5. Anordnung nach Anspruch 1, 2, 3 oder 4, dadurch gekennzeichnet, daß die Verteilerlöcher (19) der Brennkammerplatte (12) in dem Plattenelement (14b) zwischen den Unterteilungselementen (22, 23) ausgebildet sind.
6. Anordnung nach Anspruch 1, 2, 3, 4 oder 5, dadurch gekennzeichnet, daß die Verteilerlöcher (19) nicht in einem vorgegebenen Bereich nahe dem Unterteilungselement (23) auf der Seite des Austrittsraumes (27) ausgebildet sind.
7. Anordnung nach einem der vorhergehenden Ansprüche, dadurch gekennzeichnet, daß eine erste Öffnung (30) in dem zweiten Abdeckrahmen (15b) zum Einführen und zum Entfernen des Katalysators (46) in die bzw. aus der Brennkammer (25) der Brennkammerplatte (12) ausgebildet ist.
8. Anordnung nach einem der vorhergehenden Ansprüche, dadurch gekennzeichnet, daß die erste Öffnung (30) zum Einführen und Entfernen des Katalysators nahe dem Unterteilungselement (22) auf der Seite des Eintrittsraumes (26) ausgebildet ist und mit der Lufteinlaßöffnung (17) fluchtet, die nahe dem Unterteilungselement (22) auf der Seite des Austrittsraumes (26) ausgebildet ist.
9. Anordnung nach einem der vorhergehenden Ansprüche, dadurch gekennzeichnet, daß eine zweite Öffnung (29) in dem dritten Abdeckrahmen (15a) zum Einführen und Entfernen des Katalysators (47) in die bzw. aus der Reformierkammer (24) der Reformierkammerplatte (13) gebildet ist.
10. Anordnung nach einem der vorhergehenden Ansprüche, dadurch gekennzeichnet, daß die zweite Öffnung (29) zum Einführen und Entfernen des Katalysators nahe dem Unterteilungselement (22) auf der Seite des Eintrittsraumes (26) ausgebildet ist und mit der Rohgasöffnung (20) fluchtet, die nahe dem Unterteilungselement (22) auf der Seite des Einlaßraumes (26) ausgebildet ist.
11. Anordnung nach einem der vorhergehenden Ansprüche, dadurch gekennzeichnet, daß die Mehrschichteneinheit (10) in der Weise ausgebildet ist, daß der Eintrittsraum (26) und der Austrittsraum (27) der

EP 0 430 184 B1

Brennstoffeinführungsplatten (11), der Brennkammerplatten (12) und der Reformierkammerplatten (13) in Höhenrichtung der Mehrschichteneinheit (10) miteinander fluchten.

- 5 12. Anordnung nach einem der vorhergehenden Ansprüche, dadurch gekennzeichnet, daß die Mehrschichteneinheit (10) vier Seitenflächen hat, wobei je zwei einander zugewandte Flächen und die Lufteinlaßöffnung (17) und die erste Öffnung (30) zum Einführen und Entfernen des Katalysators der Brennkammerplatte (12) in einer Seitenfläche ausgebildet sind, welche einer gegenüberliegenden Fläche zugewandt ist, in der die Rohgaseinlaßöffnung (20) und die zweite Katalysatoreinführungs- und -entfernungsöffnung (29) der Reformierkammerplatte (13) ausgebildet sind.
- 10 13. Anordnung nach einem der vorhergehenden Ansprüche, dadurch gekennzeichnet, daß die Platten (11, 12, 13, 32) durch TIG- oder MIG-Schweißen miteinander verschweißt sind.
- 15 14. Anordnung nach einem der vorhergehenden Ansprüche, dadurch gekennzeichnet, daß der Anschlußstutzen (37, 38, 39, 40, 41) einen Verbindungszylinder (37a, 38a, 39a, 40a, 41a), welcher an der Seitenfläche der Mehrschichteneinheit (10) angeschweißt ist und die Einlaß- und Auslaßöffnungen (16, 17, 18, 20, 21) bedeckt, sowie einen Flansch (37b, 38b, 39b, 40b, 41b) umfaßt, der mit dem Verbindungszylinder (37a, 38a, 39a, 40a, 41a) verbunden ist.
- 20 15. Anordnung nach einem der vorhergehenden Ansprüche, dadurch gekennzeichnet, daß der Rohgaseinlaßanschlußstutzen (40) und der Lufteinlaßanschlußstutzen (38) jeweils so geformt sind, daß sie die Einlaßöffnungen (20, 17) und die Katalysatoreinführungs- und -entfernungsöffnungen (29, 30) überdecken, wobei die Katalysatoreinlaß- und -auslaßöffnungen (29, 30) mit Dichtungsmitteln zu ihrer Abdichtung versehen sind.
- 25 16. Anordnung nach einem der vorhergehenden Ansprüche, dadurch gekennzeichnet, daß die Dichtungsmittel eine Platte (42, 33) mit einer schlitzförmigen Öffnung (29a, 30a) umfassen, welche der Katalysatoreinlaß- und -auslaßöffnung (29, 30) entspricht und welche an der Seitenfläche der Mehrschichteneinheit (10) angeschweißt ist, und daß die Dichtungsmittel eine Dichtungsplatte (44, 45) umfassen, die an der Platte (42, 33) mittels Schrauben befestigt ist.
- 30 17. Anordnung nach einem der vorhergehenden Ansprüche, dadurch gekennzeichnet, daß eine obere und eine untere Trägerplatte (33, 35) an der Oberseite und der Unterseite der Mehrschichteneinheit (10) angeordnet sind, und daß eine weitere obere und untere Platte an den Trägerplatten (33, 35) angeordnet sind.
- 35 18. Anordnung nach einem der vorhergehenden Ansprüche, dadurch gekennzeichnet, daß die Platten (11, 12, 13) durch Verschweißen der Umfangsränder der einander benachbarten Platten (11, 12, 13) miteinander verschweißt sind.

Revendications

1. Ensemble reformeur du type à plateaux comprenant :
 - 45 - un plateau (11) d'introduction de combustible possédant une première plaque (14c), et un premier cadre de masquage (15c), le premier cadre de masquage (15c) ayant une certaine hauteur, le premier cadre de masquage (15c) étant monté solidairement sur la périphérie de la première plaque, un orifice d'amenée du combustible étant formé dans le premier cadre de masquage (15c) ;
 - 50 - un plateau (12) de chambre de combustion ayant une seconde plaque (14b) et un second cadre de masquage (15b), le second cadre de masquage (15b) ayant une certaine hauteur, le second cadre de masquage (15b) étant monté solidairement sur la périphérie de la seconde plaque (14b), et une pluralité de trous de dispersion (19) étant formés dans la seconde plaque (14b), un orifice d'amenée de l'air (17) et un orifice de déchargement des gaz d'échappement (18) étant respectivement formés dans le second cadre de masquage (15b), un catalyseur de combustion (46) étant placé dans le second cadre de masquage (15b) ;
 - 55 - un plateau (13) de chambre de reformage ayant une troisième plaque (14a) et un troisième cadre de masquage (15a), le troisième cadre de masquage (15a) ayant une certaine hauteur, le troisième cadre de masquage (15a) étant monté solidairement sur la périphérie de la troisième plaque (14a), un orifice (20) d'amenée du gaz de matière première et un orifice (21) de déchargement du gaz re-

EP 0 430 184 B1

formé étant respectivement formés dans le troisième cadre de masquage (15a), un catalyseur de reformage (47) étant placé dans le troisième cadre de masquage (15a) ;


- une unité multicouche (10) comprenant les plateaux (11) d'introduction du combustible, les plateaux (12) de chambre de combustion, les plateaux (13) de chambre de reformage et un plateau séparateur (32), les plateaux (11) d'introduction du combustible, les plateaux (12) de chambre de combustion et les plateaux (13) de chambre de reformage étant empilés tour à tour pour définir des couches multiples (une couche supérieure étant appelée "couche extrême supérieure"), l'unité multicouche (10) ayant une direction dans le sens de sa hauteur et une face latérale, les orifices d'amenée et de déchargement (16, 17, 18, 20, 21) des plateaux (11, 12, 13) étant alignés les uns avec les autres dans la direction de la hauteur de l'unité multicouche (10), le plateau séparateur (32) étant prévu sur le plateau (13) de chambre de reformage de la couche extrême supérieure de l'unité (10), le plateau (11) d'introduction du combustible, le plateau (12) de chambre de combustion, le plateau (13) de chambre de reformage et le plateau séparateur (32) étant soudés les uns aux autres à leurs périphéries ; et
 - des collecteurs (37, 38, 39, 40, 41) soudés sur la face latérale de l'unité multicouche (10) pour couvrir les orifices d'amenée et de déchargement (16, 17, 18, 20, 21).
2. Ensemble selon la revendication 1, caractérisé en ce que chaque plateau (11 ; 12 ; 13) comporte une paire de cloisons (22, 23) placées sur la plaque (14c ; 14b ; 14a) de ce plateau pour définir la chambre (31) d'introduction du combustible, avec la chambre (25) de combustion ou la chambre (24) de reformage entre les cloisons (22, 23), et pour définir un compartiment d'entrée (26) et un compartiment de sortie (27) à l'extérieur des cloisons (22, 23) (la cloison (22) qui définit le compartiment d'entrée (26) étant appelée "cloison du côté du compartiment d'entrée" et la cloison (23) qui définit le compartiment de sortie (27) étant appelée "cloison du côté du compartiment de sortie").
 3. Ensemble selon la revendication 1 ou 2, caractérisé en ce que la cloison (22 ; 23) présente une partie convexo-concave pour laisser les gaz passer à travers la cloison (22 ; 23) à travers la partie concave.
 4. Ensemble selon la revendication 1, 2 ou 3, caractérisé en ce que chaque plateau (11 ; 12 ; 13) comporte une pluralité d'éléments entretoises (28) prévus sur la plaque (14c ; 14b ; 14a) de ce plateau, l'élément entretoise (28) atteignant la hauteur du cadre de masquage (15c ; 15b ; 15a).
 5. Ensemble selon la revendication 1, 2, 3 ou 4, caractérisé en ce que les trous de dispersion (19) du plateau (12) de chambre de combustion sont formés dans la plaque (14b) entre les cloisons (22, 23).
 6. Ensemble selon la revendication 1, 2, 3, 4 ou 5, caractérisé en ce que les trous de dispersion (19) ne sont pas formés dans une zone prédéterminée proche de la cloison (23) du côté du compartiment de sortie (27).
 7. Ensemble selon l'une quelconque des revendications précédentes, caractérisé en ce qu'une première ouverture (30) est formée dans le second cadre de masquage (15b) pour l'introduction du catalyseur (46) dans la chambre de combustion (25) du plateau (12) de chambre de combustion et l'évacuation de ce catalyseur de cette chambre.
 8. Ensemble selon l'une quelconque des revendications précédentes, caractérisé en ce que la première ouverture (30) d'introduction et d'évacuation du catalyseur est formée à proximité de la cloison (22) du côté du compartiment d'entrée (26), et est alignée avec l'orifice (17) d'amenée de l'air formé à proximité de la cloison (22) du côté du compartiment d'entrée (26).
 9. Ensemble selon l'une quelconque des revendications précédentes, caractérisé en ce qu'une seconde ouverture (29) est formée dans le troisième cadre de masquage (15a) pour l'introduction d'un catalyseur (47) dans la chambre de reformage (24) du plateau (13) de chambre de reformage et l'évacuation du catalyseur de cette chambre.
 10. Ensemble selon l'une quelconque des revendications précédentes, caractérisé en ce que la seconde ouverture (29) d'introduction et d'évacuation du catalyseur est formée à proximité de la cloison (22) du côté du compartiment d'entrée (26), et est alignée avec l'orifice (20) d'amenée du gaz de matière première formé à proximité de la cloison (22) du côté du compartiment d'entrée (26).

EP 0 430 184 B1

- 5 11. Ensemble selon l'une quelconque des revendications précédentes, caractérisé en ce que l'unité multicouche (10) est agencée de manière que les compartiments d'entrée (26) et les compartiments de sortie (27) des plateaux (11) d'introduction du combustible, des plateaux (12) de chambre de combustion et des plateaux (13) de chambre de reformage soient alignés les uns avec les autres dans la direction de la hauteur de l'unité multicouche (10).
- 10 12. Ensemble selon l'une quelconque des revendications précédentes, caractérisé en ce que l'unité multicouche (10) possède quatre faces latérales, les deux faces de chaque paire se regardant mutuellement, et l'orifice (17) d'amenée de l'air et la première ouverture (30) d'introduction et d'évacuation du catalyseur du plateau (12) de chambre de combustion sont formés dans une face latérale qui regarde une face opposée dans laquelle sont formés l'orifice (20) d'amenée du gaz de matière première et la seconde ouverture (29) d'introduction et d'évacuation du catalyseur du plateau (13) de chambre de reformage.
- 15 13. Ensemble selon l'une quelconque des revendications précédentes, caractérisé en ce que les plateaux (11, 12, 13, 32) sont soudés par un procédé de soudage TIG ou MIG.
- 20 14. Ensemble selon l'une quelconque des revendications précédentes, caractérisé en ce que le collecteur (37, 38, 39, 40, 41) comprend un cylindre de raccordement (37a, 38a, 39a, 40a, 41a) soudé sur la face latérale de l'unité multicouche (10) et qui couvre les orifices d'amenée et de déchargement (16, 17, 18, 20, 21), ainsi qu'une bride (37b, 38b, 39b, 40b, 41b) fixée au cylindre de raccordement (37a, 38a, 39a, 40a, 41a).
- 25 15. Ensemble selon l'une quelconque des revendications précédentes, caractérisé en ce que le collecteur (40) d'amenée du gaz de matière première et le collecteur (38) d'amenée de l'air ont respectivement une configuration appropriée pour couvrir les orifices d'amenée (20, 17) et les orifices (29, 30) d'introduction et d'évacuation du catalyseur, et les orifices (29, 30) d'introduction et d'évacuation du catalyseur sont munis de moyens d'étanchéité pour les obturer à joint étanche.
- 30 16. Ensemble selon l'une quelconque des revendications précédentes, caractérisé en ce que les moyens d'étanchéité comprennent une plaque (42, 33) présentant une ouverture (29a, 30a) en forme de fente qui correspond à l'orifice (29, 30) d'introduction et d'évacuation du catalyseur, et soudée sur la face latérale de l'unité multicouche (10), ainsi qu'une plaque d'étanchéité (44, 45) montée sur la plaque (42, 43) au moyen de vis.
- 35 17. Ensemble selon l'une quelconque des revendications précédentes, caractérisé en ce qu'une paire de plaques supports supérieure et inférieure (33, 35) sont montées sur le sommet et sur la base de l'unité multicouche (10), et une autre paire de plaques supérieure et inférieure sont montées sur les plateaux supports (33, 35).
- 40 18. Ensemble selon l'une quelconque des revendications précédentes, caractérisé en ce que les plateaux (11, 12, 13) sont soudés par soudage de la périphérie des plateaux (11, 12, 13) adjacents.


EP 0 430 184 B1

FIG. 1

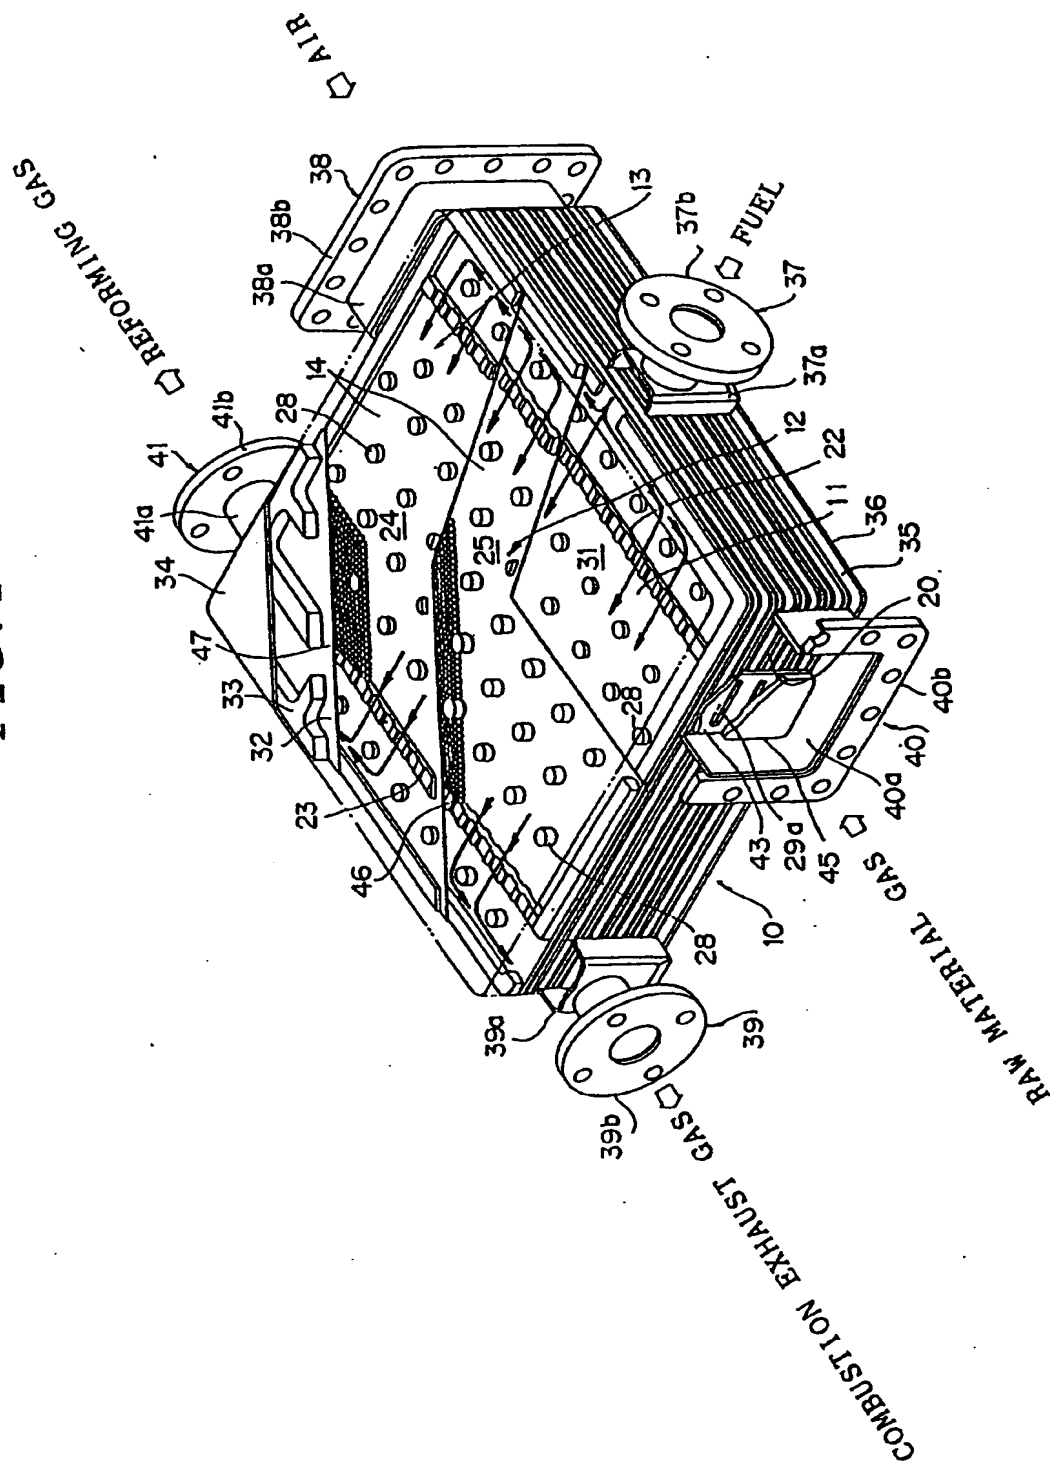


EP 0 430 184 B1

FIG. 2

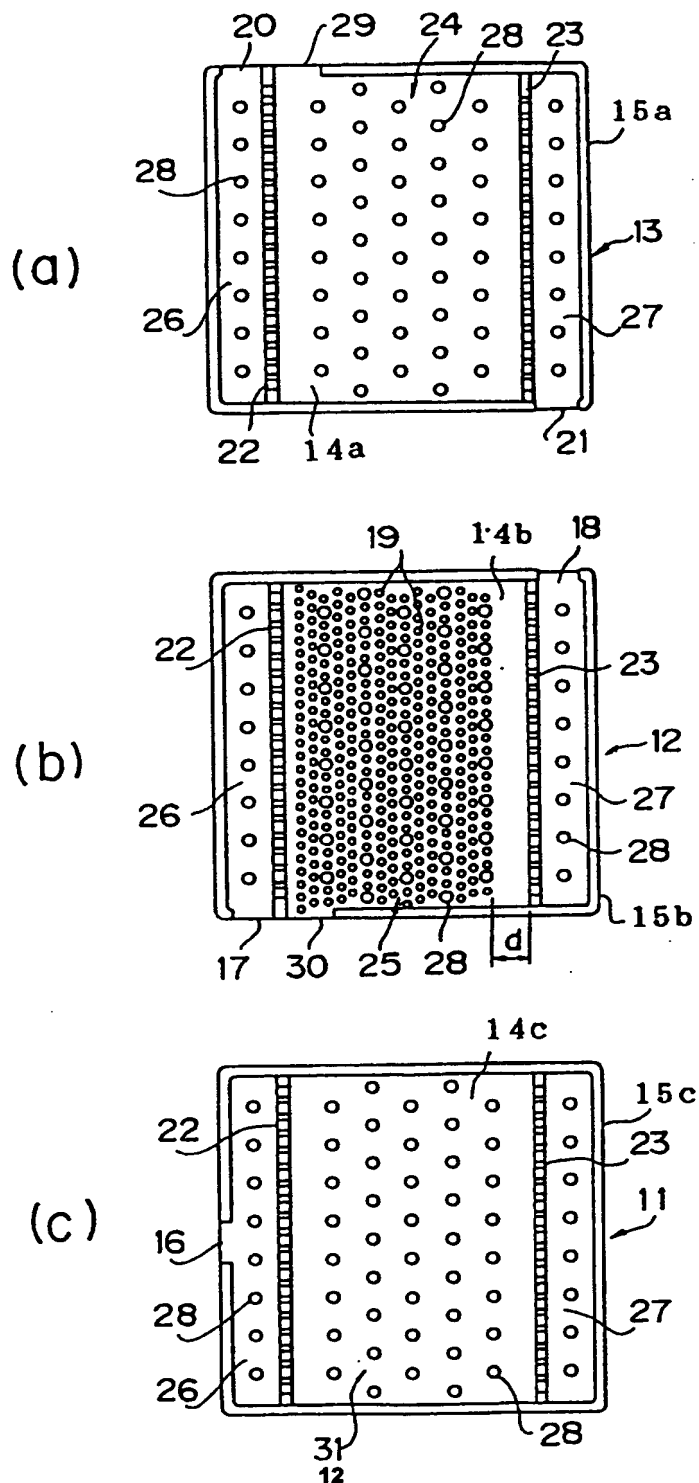

EP 0 430 184 B1

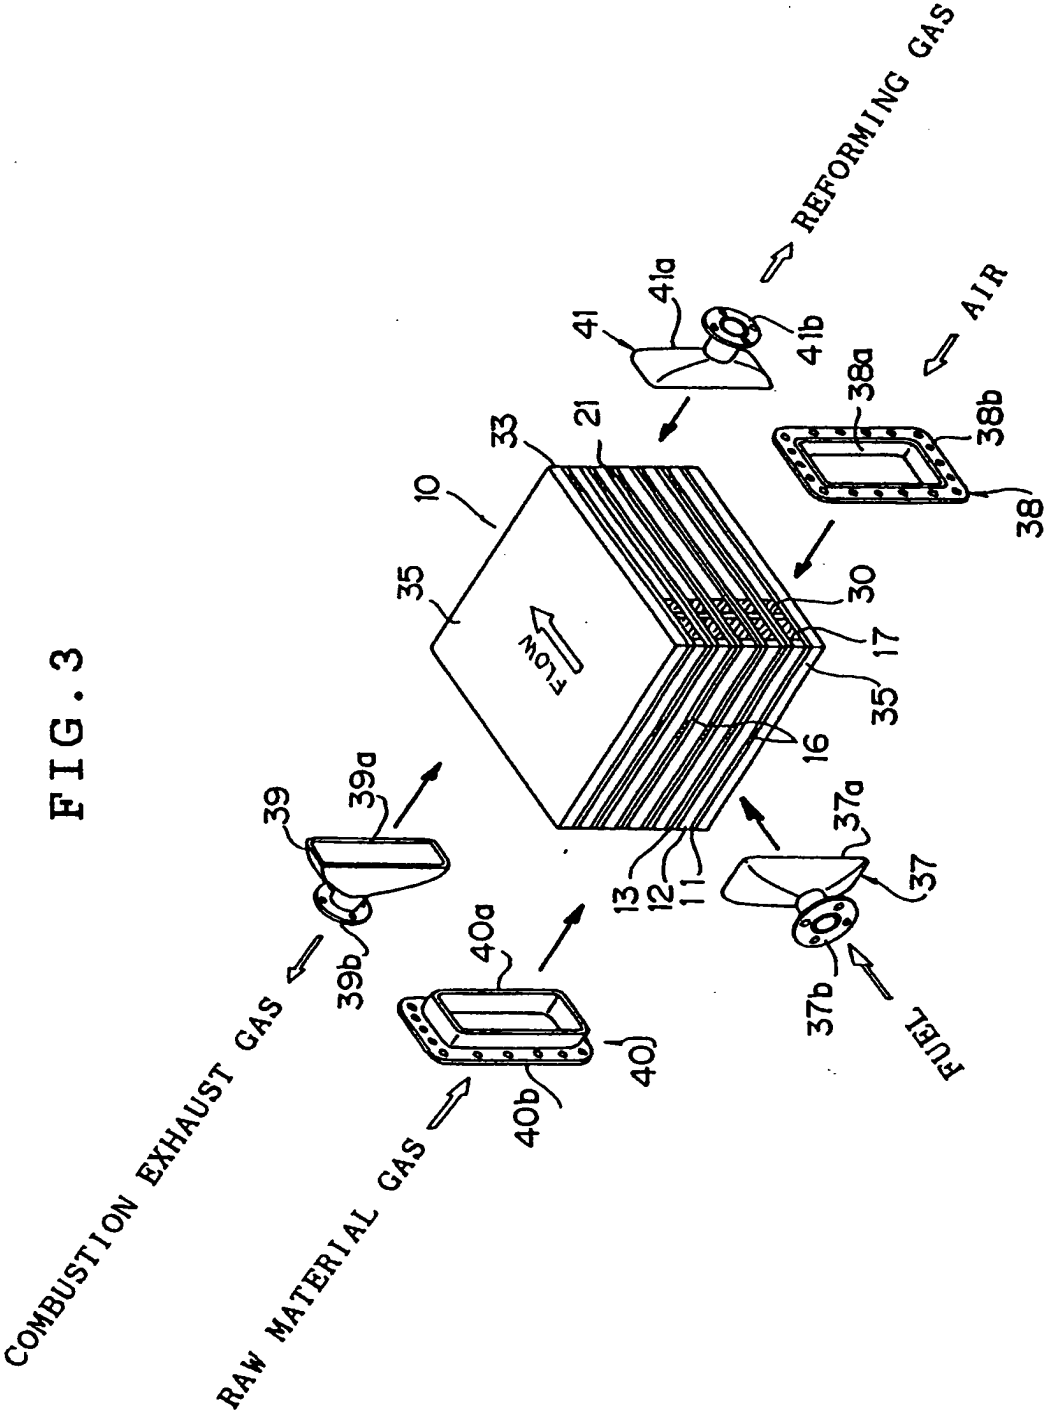

EP 0 430 184 B1

FIG. 4

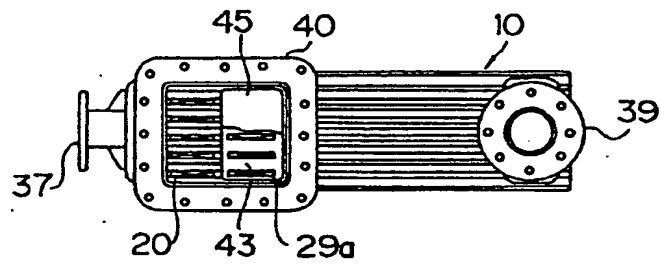


FIG. 5

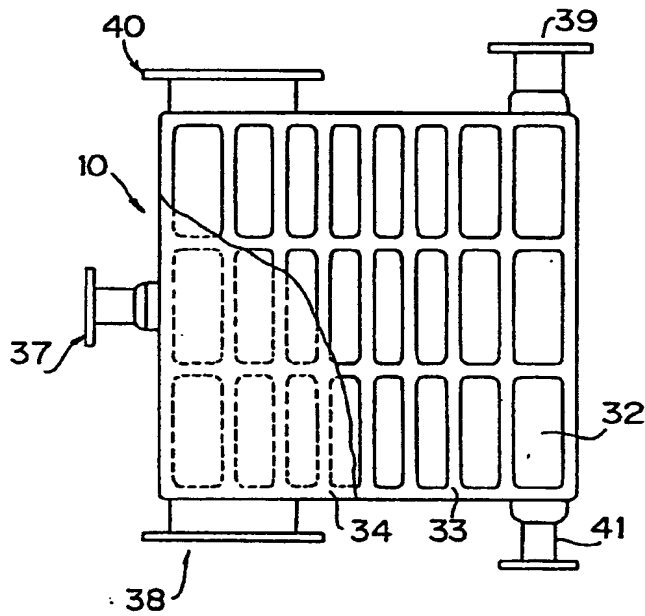


FIG. 7

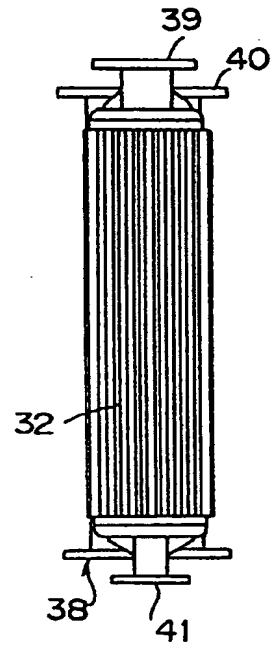


FIG. 6

